
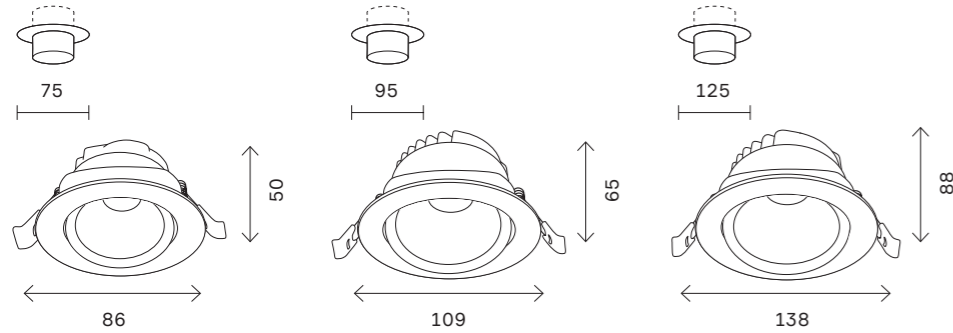


ST211



ST211.538.06.24
ST211.548.06.24
ST211.538.08.36
ST211.548.08.36

ST211.538.10.36
ST211.548.10.36
ST211.538.15.36
ST211.548.15.36



ST211.538.24.36
ST211.548.24.36

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэфф. цвето-передачи, RA	угол рассеивания, °
□ ST211.538.06.24	led × 6	480	3000	80	24
□ ST211.548.06.24	led × 6	480	4000	80	24
□ ST211.538.08.36	led × 8	640	3000	80	36
□ ST211.548.08.36	led × 8	750	4000	80	36
□ ST211.538.10.36	led × 10	1125	3000	80	36
□ ST211.548.10.36	led × 10	1800	4000	80	36
□ ST211.538.15.36	led × 15	640	3000	80	36
□ ST211.548.15.36	led × 15	750	4000	80	36
□ ST211.538.24.36	led × 24	1125	3000	80	36
□ ST211.548.24.36	led × 24	1800	4000	80	36

244

встраиваемые светильники

ST700 IP44

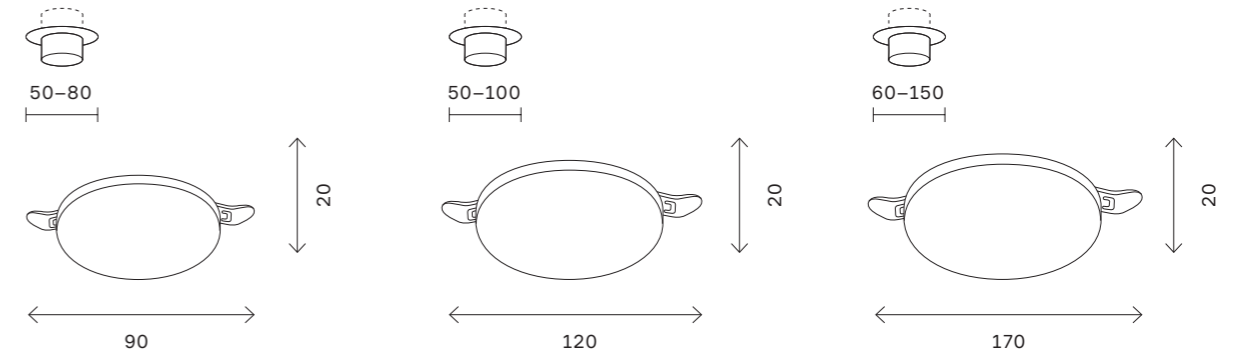

ST700.538.08
ST700.548.08

ST700.538.16
ST700.548.16

ST700.538.22
ST700.548.22

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэфф. цвето-передачи, RA	угол рассеивания, °
□ ST700.538.08	led × 8	690	3000	80	180
□ ST700.538.16	led × 16	1380	3000	80	180
□ ST700.538.22	led × 22	1890	3000	80	180
□ ST700.548.08	led × 8	690	4000	80	180
□ ST700.548.16	led × 16	1380	4000	80	180
□ ST700.548.22	led × 22	1890	4000	80	180

245

встраиваемые светильники