



ST378 AROUND




черный



белый

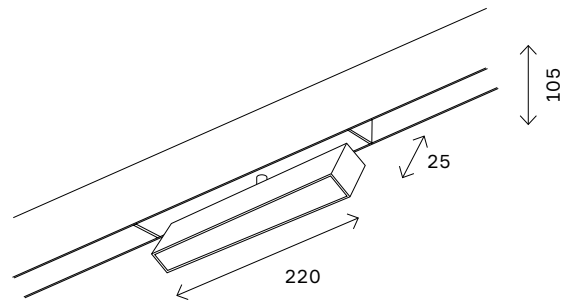

ST378.406.09
ST378.506.09

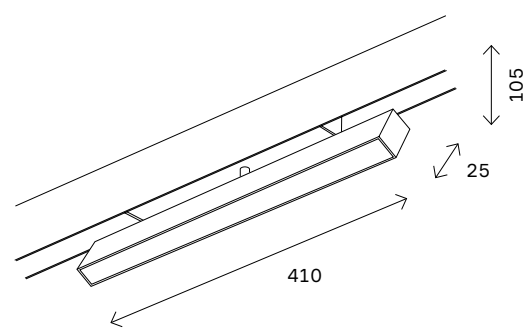

ST378.406.18
ST378.506.18

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэфф. цвето-передачи, RA	угол рассеивания, °
■ ST378.406.09	led × 9	760	2700 K–6000	>90	
□ ST378.506.09	led × 9	760	2700 K–6000	>90	
■ ST378.406.18	led × 18	1520	2700 K–6000	>90	
□ ST378.506.18	led × 18	1520	2700 K–6000	>90	

112

магнитная трековая система SKYLINE 220 V



ST660 AROUND




черный



белый

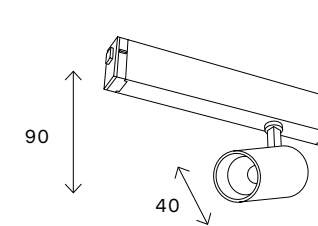

ST660.496.10
ST660.596.10

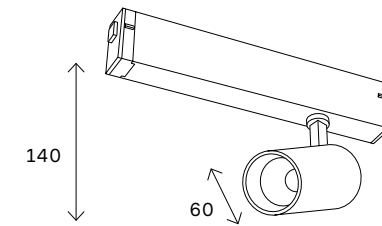

ST660.496.20
ST660.596.20

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэфф. цвето-передачи, RA	угол рассеивания, °
■ ST660.496.10	led × 10	535	2700 K–6000	>90	36
□ ST660.596.10	led × 10	535	2700 K–6000	>90	36
■ ST660.496.20	led × 20	1065	2700 K–6000	>90	36
□ ST660.596.20	led × 20	1065	2700 K–6000	>90	36

113

магнитная трековая система SKYLINE 220 V