


ST351

- черный
- белый
- 1
PHASE LED
- RA>90 36°
- 220V IP20

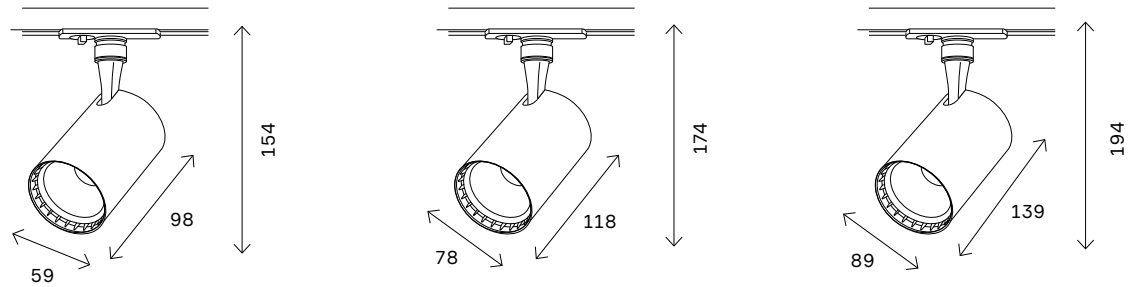


- | | | | |
|-----------------|-----------------|-----------------|-----------------|
| ST351.436.10.36 | ST351.436.15.36 | ST351.436.20.36 | ST351.436.30.36 |
| ST351.446.10.36 | ST351.446.15.36 | ST351.446.20.36 | ST351.446.30.36 |
| ST351.536.10.36 | ST351.536.15.36 | ST351.536.20.36 | ST351.536.30.36 |
| ST351.546.10.36 | ST351.546.15.36 | ST351.546.20.36 | ST351.546.30.36 |

| артикул | мощность, W | световой поток, LM | цветовая температура, K | коэфф. цвето-передачи, RA | угол рассеивания, ° |
|-------------------|-------------|--------------------|-------------------------|---------------------------|---------------------|
| ■ ST351.436.10.36 | led × 10 | 900 | 3000 | >90 | 36 |
| ■ ST351.446.10.36 | led × 10 | 900 | 4000 | >90 | 36 |
| □ ST351.536.10.36 | led × 10 | 900 | 3000 | >90 | 36 |
| □ ST351.546.10.36 | led × 10 | 900 | 4000 | >90 | 36 |
| ■ ST351.436.15.36 | led × 15 | 1350 | 3000 | >90 | 36 |
| ■ ST351.446.15.36 | led × 15 | 1350 | 4000 | >90 | 36 |
| □ ST351.536.15.36 | led × 15 | 1350 | 3000 | >90 | 36 |
| □ ST351.546.15.36 | led × 15 | 1350 | 4000 | >90 | 36 |
| ■ ST351.436.20.36 | led × 20 | 1800 | 3000 | >90 | 36 |
| ■ ST351.446.20.36 | led × 20 | 1800 | 4000 | >90 | 36 |
| □ ST351.536.20.36 | led × 20 | 1800 | 3000 | >90 | 36 |
| □ ST351.546.20.36 | led × 20 | 1800 | 4000 | >90 | 36 |
| ■ ST351.436.30.36 | led × 30 | 2700 | 3000 | >90 | 36 |
| ■ ST351.446.30.36 | led × 30 | 2700 | 4000 | >90 | 36 |
| □ ST351.536.30.36 | led × 30 | 2700 | 3000 | >90 | 36 |
| □ ST351.546.30.36 | led × 30 | 2700 | 4000 | >90 | 36 |

однофазная трековая система 150

ST600 ZOOM

- черный
- белый
- 1
PHASE LED RA>90
- 10-60° 220V IP20

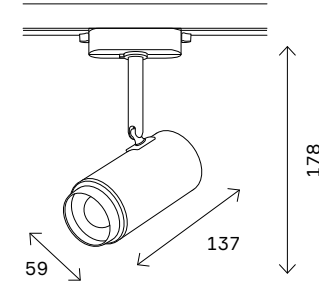

- | | |
|--------------|--------------|
| ST600.436.12 | ST600.446.12 |
| ST600.536.12 | ST600.546.12 |




однофазная трековая система 151

| артикул | мощность, W | световой поток, LM | цветовая температура, K | коэфф. цвето-передачи, RA | угол рассеивания, ° |
|----------------|-------------|--------------------|-------------------------|---------------------------|---------------------|
| ■ ST600.436.12 | led × 12 | 1200 | 3000 | >90 | 10-60 |
| ■ ST600.446.12 | led × 12 | 1200 | 4000 | >90 | 10-60 |
| □ ST600.536.12 | led × 12 | 1200 | 3000 | >90 | 10-60 |
| □ ST600.546.12 | led × 12 | 1200 | 4000 | >90 | 10-60 |

ST650

- черный
- белый
- 1
PHASE LED RA>90 36°
- GU10 220V IP20

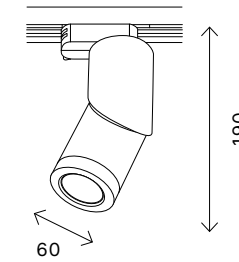

- | | |
|--------------|--------------|
| ST650.406.01 | ST650.446.10 |
| ST650.506.01 | ST650.536.10 |
| ST650.436.10 | ST650.546.10 |



| артикул | мощность, W | световой поток, LM | цветовая температура, K | коэфф. цвето-передачи, RA | угол рассеивания, ° |
|----------------|-------------|--------------------|-------------------------|---------------------------|---------------------|
| ■ ST650.406.01 | GU10 × 50 | | | | |
| ■ ST650.436.10 | led × 10 | 800 | 3000K | >90 | 38 |
| ■ ST650.446.10 | led × 10 | 800 | 4000K | >90 | 38 |
| □ ST650.506.01 | GU10 × 50 | | | | |
| □ ST650.536.10 | led × 10 | 800 | 3000K | >90 | 38 |
| □ ST650.546.10 | led × 10 | 800 | 4000K | >90 | 38 |