
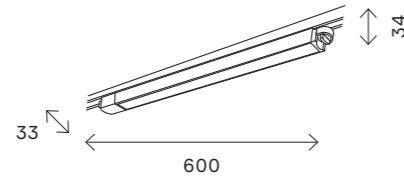
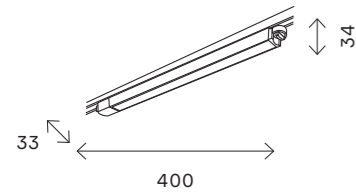


ST366 CRI98

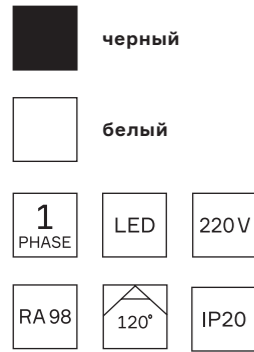

ST366.438.12
ST366.448.12
ST366.538.12
ST366.548.12



ST366.438.24
ST366.448.24
ST366.538.24
ST366.548.24

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэфф. цвето-передачи, RA	угол рассеивания, °
■ ST366.438.12	led × 12	1100	3000	98	120
■ ST366.438.24	led × 24	2250	3000	98	120
■ ST366.448.12	led × 12	1250	4000	98	120
■ ST366.448.24	led × 24	2450	4000	98	120
□ ST366.538.12	led × 12	1100	3000	98	120
□ ST366.538.24	led × 24	2250	3000	98	120
□ ST366.548.12	led × 12	1250	4000	98	120
□ ST366.548.24	led × 24	2450	4000	98	120

214

однофазная трековая система

ST368

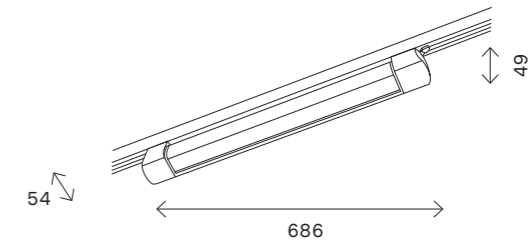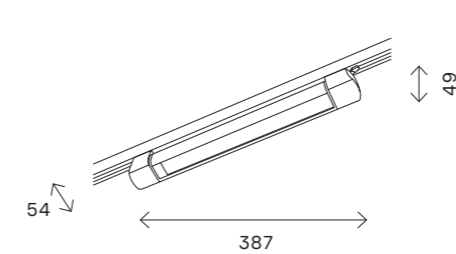

ST368.436.10
ST368.446.10
ST368.536.10
ST368.546.10

ST368.436.20.2
ST368.446.20.2
ST368.536.20.2
ST368.546.20.2

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэфф. цвето-передачи, RA	угол рассеивания, °
■ ST368.436.10	led × 10	725	3000	>90	120
■ ST368.446.10	led × 10	725	4000	>90	120
□ ST368.536.10	led × 10	725	3000	>90	120
□ ST368.546.10	led × 10	725	4000	>90	120
■ ST368.436.20.2	led × 20	1450	3000	>90	120
■ ST368.446.20.2	led × 20	1450	4000	>90	120
□ ST368.536.20.2	led × 20	1450	3000	>90	120
□ ST368.546.20.2	led × 20	1450	4000	>90	120

215

однофазная трековая система