

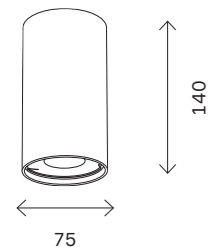


ST157 IP44

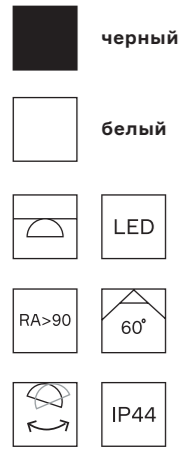

ST157.432.15
ST157.442.15
ST157.532.15
ST157.542.15

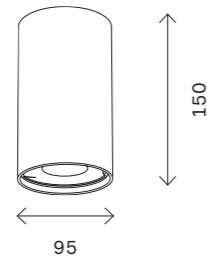

ST157.432.20
ST157.442.20
ST157.532.20
ST157.542.20

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэфф. цвето-передачи, RA	угол рассеивания, °
■ ST157.432.15	led × 15	1200	3000	>90	60
□ ST157.532.15	led × 15	1200	3000	>90	60
■ ST157.442.15	led × 15	1200	4000	>90	60
□ ST157.542.15	led × 15	1200	4000	>90	60
■ ST157.432.20	led × 20	1600	3000	>90	60
□ ST157.532.20	led × 20	1600	3000	>90	60
■ ST157.442.20	led × 20	1600	4000	>90	60
□ ST157.542.20	led × 20	1600	4000	>90	60

накладные светильники 280



накладные светильники 281