



Управление AROUND



ST015.400.99
 ■ **черный**
 ■ **ST015.500.99**
 □ **белый**
 панель управления BLE
 L86 × W86 × H13 MM



ST015.400.98
 ■ **черный**
 ■ **ST015.500.98**
 □ **белый**
 пульт управления BLE
 L150 × W38 × H13 MM



ST015.500.97
 □ **белый**
 конвертер Wi-Fi
 L64 × W64 × H13 MM

ST850 AROUND


черный
 белый

SHIFT

SMART

LED
RA>90
2700 K-6000K

IP20

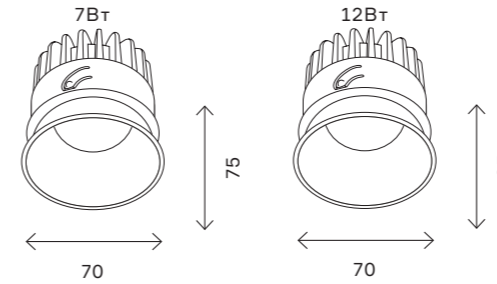

- ST850.408.07
- ST850.408.12
- ST850.508.07
- ST850.508.12
- ST851.538.07
- ST851.538.12
- ST851.548.07
- ST851.548.12
- ST851.438.07
- ST851.438.12
- ST851.448.07
- ST851.448.12

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэфф. цветопередачи, RA	угол рассеивания, °
■ ST850.408.07	led × 7	560	2700-6500	>90	36
■ ST850.408.12	led × 12	960	2700-6500	>90	36
□ ST850.508.07	led × 7	560	2700-6500	>90	36
□ ST850.508.12	led × 12	960	2700-6500	>90	36

ST851

SHIFT
LED
RA>90

IP20

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэфф. цветопередачи, RA	угол рассеивания, °
■ ST851.438.07	led × 7	560	3000	>90	36
■ ST851.438.12	led × 12	960	3000	>90	36
■ ST851.448.07	led × 7	560	4000	>90	36
■ ST851.448.12	led × 12	960	4000	>90	36
□ ST851.538.07	led × 7	560	3000	>90	36
□ ST851.538.12	led × 12	960	3000	>90	36
□ ST851.548.07	led × 7	560	4000	>90	36
□ ST851.548.12	led × 12	960	4000	>90	36