



ST661

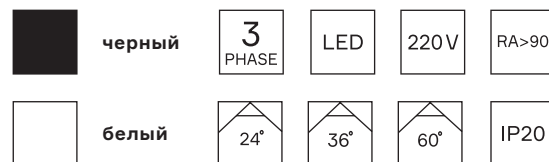

трекфазная трековая система 200

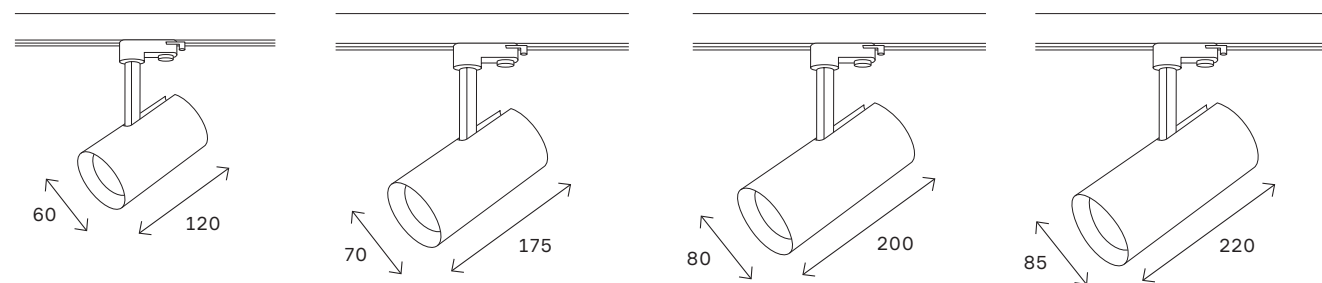

ST661.436.10
ST661.536.10
ST661.446.10
ST661.546.10

ST661.436.20
ST661.536.20
ST661.446.20
ST661.546.20





ST661.436.30
ST661.536.30
ST661.446.30
ST661.546.30

ST661.436.40
ST661.536.40
ST661.446.40
ST661.546.40

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэфф. цветопередачи, RA	угол рассеивания, °
■ ST661.436.10	led × 10	800	3000	>90	36
■ ST661.436.20	led × 20	1600	3000	>90	36
■ ST661.436.30	led × 30	2400	3000	>90	36
■ ST661.436.40	led × 40	3200	3000	>90	36
□ ST661.536.10	led × 10	800	3000	>90	36
□ ST661.536.20	led × 20	1600	3000	>90	36
□ ST661.536.30	led × 30	2400	3000	>90	36
□ ST661.536.40	led × 40	3200	3000	>90	36
■ ST661.446.10	led × 10	800	4000	>90	36
■ ST661.446.20	led × 20	1600	4000	>90	36
■ ST661.446.30	led × 30	2400	4000	>90	36
■ ST661.446.40	led × 40	3200	4000	>90	36
□ ST661.546.10	led × 10	800	4000	>90	36
□ ST661.546.20	led × 20	1600	4000	>90	36
□ ST661.546.30	led × 30	2400	4000	>90	36
□ ST661.546.40	led × 40	3200	4000	>90	36

Рефлекторы для светильника ST661

■ **хром**

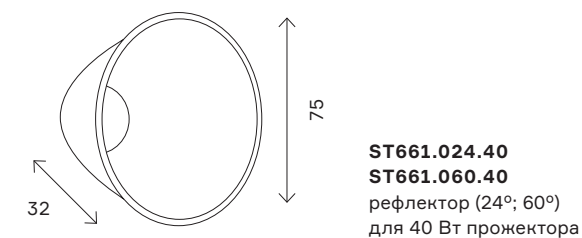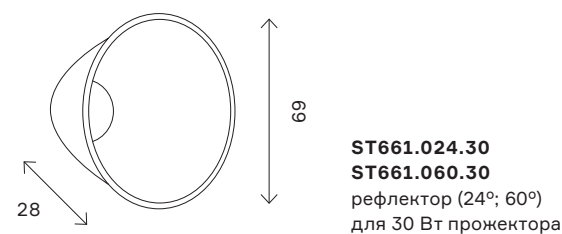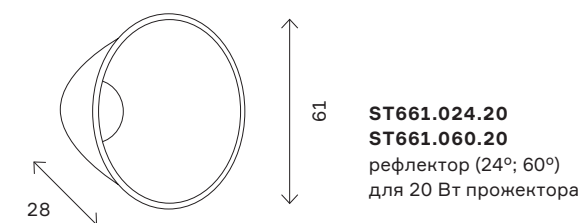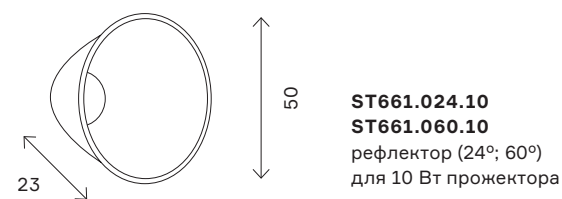

трекфазная трековая система 201