



ST662



черный



белый

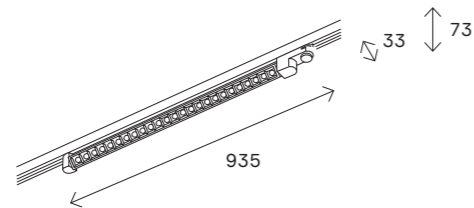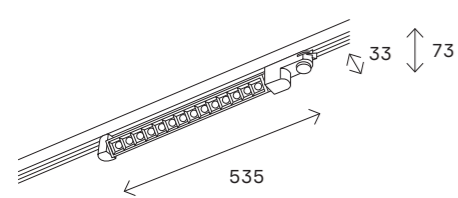

ST662.436.15
ST662.446.15
ST662.536.15
ST662.546.15

ST662.436.30
ST662.446.30
ST662.536.30
ST662.546.30

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэфф. цвето-передачи, RA	угол рассеивания, °
■ ST662.436.15	led × 15	1200	3000	>90	48
■ ST662.446.15	led × 15	1200	4000	>90	48
□ ST662.536.15	led × 15	1200	3000	>90	48
□ ST662.546.15	led × 15	1200	4000	>90	48
■ ST662.436.30	led × 30	2400	3000	>90	48
■ ST662.446.30	led × 30	2400	4000	>90	48
□ ST662.536.30	led × 30	2400	3000	>90	48
□ ST662.546.30	led × 30	2400	4000	>90	48

трекфазная трековая система 204



трекфазная трековая система 205