

# ST367



ST367.436.10  
ST367.446.10  
ST367.536.10  
ST367.546.10


ST367.436.20.2  
ST367.446.20.2  
ST367.536.20.2  
ST367.546.20.2

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэф. цвето-передачи, RA	угол рассеивания, °
■ ST367.436.10	led × 10	875	3000	>90	36
■ ST367.446.10	led × 10	875	4000	>90	36
□ ST367.536.10	led × 10	875	3000	>90	36
□ ST367.546.10	led × 10	875	4000	>90	36
■ ST367.436.20.2	led × 20	1750	3000	>90	36
■ ST367.446.20.2	led × 20	1750	4000	>90	36
□ ST367.536.20.2	led × 20	1750	3000	>90	36
□ ST367.546.20.2	led × 20	1750	4000	>90	36

216

однофазная трековая система

# ST350

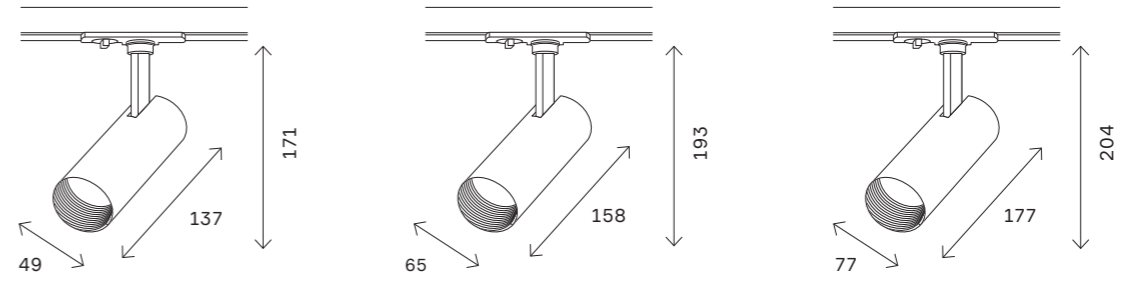

ST350.436.10.36  
ST350.446.10.36  
ST350.536.10.36  
ST350.546.10.36

ST350.436.15.36  
ST350.446.15.36  
ST350.536.15.36  
ST350.546.15.36

ST350.436.20.36  
ST350.446.20.36  
ST350.536.20.36  
ST350.546.20.36

ST350.436.30.36  
ST350.446.30.36  
ST350.536.30.36  
ST350.546.30.36

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэф. цвето-передачи, RA	угол рассеивания, °
■ ST350.436.10.36	led × 10	900	3000	>90	36
■ ST350.446.10.36	led × 10	900	4000	>90	36
□ ST350.536.10.36	led × 10	900	3000	>90	36
□ ST350.546.10.36	led × 10	900	4000	>90	36
■ ST350.436.15.36	led × 15	1350	3000	>90	36
■ ST350.446.15.36	led × 15	1350	4000	>90	36
□ ST350.536.15.36	led × 15	1350	3000	>90	36
□ ST350.546.15.36	led × 15	1350	4000	>90	36
■ ST350.436.20.36	led × 20	1800	3000	>90	36
■ ST350.446.20.36	led × 20	1800	4000	>90	36
□ ST350.536.20.36	led × 20	1800	3000	>90	36
□ ST350.546.20.36	led × 20	1800	4000	>90	36
■ ST350.436.30.36	led × 30	2700	3000	>90	36
■ ST350.446.30.36	led × 30	2700	4000	>90	36
□ ST350.536.30.36	led × 30	2700	3000	>90	36
□ ST350.546.30.36	led × 30	2700	4000	>90	36

217

однофазная трековая система