
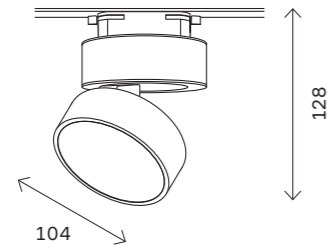
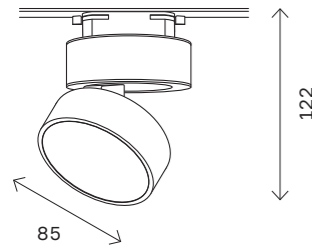


ST651



ST651.436.09
ST651.446.09
ST651.536.09
ST651.546.09



ST651.436.14
ST651.446.14
ST651.536.14
ST651.546.14

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэфф. цвето-передачи, RA	угол рассеивания, °
■ ST651.436.09	led × 9	720	3000	>90	120
■ ST651.446.09	led × 9	720	4000	>90	120
□ ST651.536.09	led × 9	720	3000	>90	120
□ ST651.546.09	led × 9	720	4000	>90	120
■ ST651.436.14	led × 14	1100	3000	>90	120
■ ST651.446.14	led × 14	1100	4000	>90	120
□ ST651.536.14	led × 14	1100	3000	>90	120
□ ST651.546.14	led × 14	1100	4000	>90	120

222

однофазная трековая система

ST652

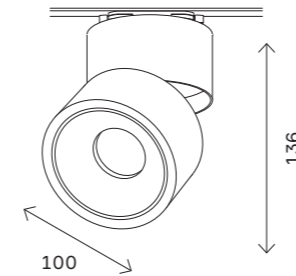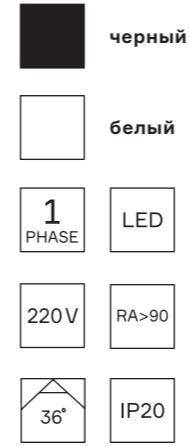

ST652.436.12
ST652.446.12
ST652.536.12
ST652.546.12

артикул	мощность, W	световой поток, LM	цветовая температура, K	коэфф. цвето-передачи, RA	угол рассеивания, °
■ ST652.436.12	led × 12	1000	3000	>90	36
■ ST652.446.12	led × 12	1000	4000	>90	36
□ ST652.536.12	led × 12	1000	3000	>90	36
□ ST652.546.12	led × 12	1000	4000	>90	36

223

однофазная трековая система