

ST650



черный



белый



1
PHASE



LED



RA>90



36°




GU10



220V



IP20



ST650.406.01 ST650.446.10
ST650.506.01 ST650.536.10
ST650.436.10 ST650.546.10

| артикул | мощность, W | световой поток, LM | цветовая температура, K | коэфф. цвето-передачи, RA | угол рассеивания, ° |
|----------------|-------------|--------------------|-------------------------|---------------------------|---------------------|
| ■ ST650.406.01 | GU10 × 50 | | | | |
| ■ ST650.436.10 | led × 10 | 800 | 3000K | >90 | 38 |
| ■ ST650.446.10 | led × 10 | 800 | 4000K | >90 | 38 |
| □ ST650.506.01 | GU10 × 50 | | | | |
| □ ST650.536.10 | led × 10 | 800 | 3000K | >90 | 38 |
| □ ST650.546.10 | led × 10 | 800 | 4000K | >90 | 38 |

224

однофазная трековая система

ST381



черный



белый



NEW



1
PHASE



220V




RA>90



GU10



IP20

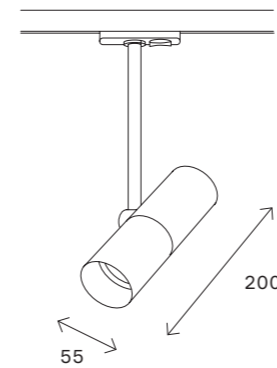

ST381.406.01
ST381.506.01

| артикул | источник света | мощность, W |
|----------------|----------------|-------------|
| ■ ST381.406.01 | GU10 × 1 | 50 |
| □ ST381.506.01 | GU10 × 1 | 50 |

225

однофазная трековая система